


KY ED560

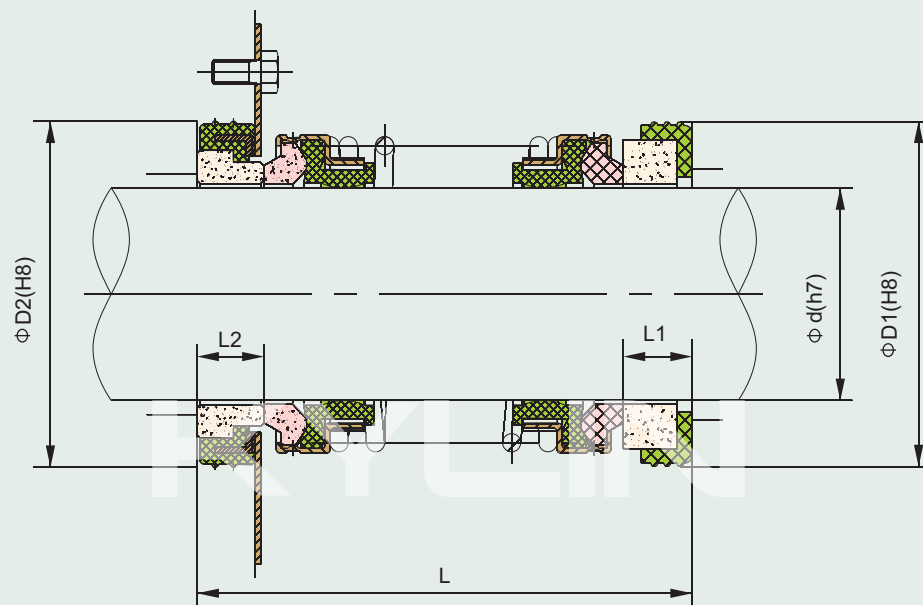

Compatibility:

- EagleBurgmann ED560

Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts (Steel)

Working Conditions

- Pumps: Submersible pumps, sewage pumps.
Applied to the muddy water, sewage water or weakly corrosive fluids with solid grains.
- Temperature: -20°C~100°C
- Pressure: $\leq 0.5\text{MPa}$ Speed: $\leq 8\text{ m/Sec}$

Part#	d	D1	D2	L	L1	L2
KY ED560-12	12	25	25	36	5	5
KY ED560-13	13	25	25	36	5	5
KY ED560-14	14	30	30	36	5	5
KY ED560-15	15	30	30	36	5	5
KY ED560-16	16	30	30	36	5	5
KY ED560-18	18	35	38	49	7	7
KY ED560-19	19	35	38	49	7	7
KY ED560-20	20	38	44	49	7	7
KY ED560-25	25	44	50	51	7	7
KY ED560-30	30	50	57	59	9	8
KY ED560-35	35	58	64	61	9	9
KY ED560-40	40	64	70	64.5	11	9
KY ED560-45	45	66	70	65	10	9
KY ED560-50	50	72	80	69.5	10	9

Double Mechanical Seals

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com